

CERTIFIED LAND CORNER RESTORATION

Index No. **P21**

State of Wisconsin }
County of Forest } ss.


I William B. Cochrane, do hereby certify that on the 31 st day of July, 19 77, I found evidence of the East Quarter corner of Section 23 Township 37 North, North, Range 12 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Miles H. Cochrane

Brian James

FORM 985 H. C. MILLER CO., MILWAUKEE

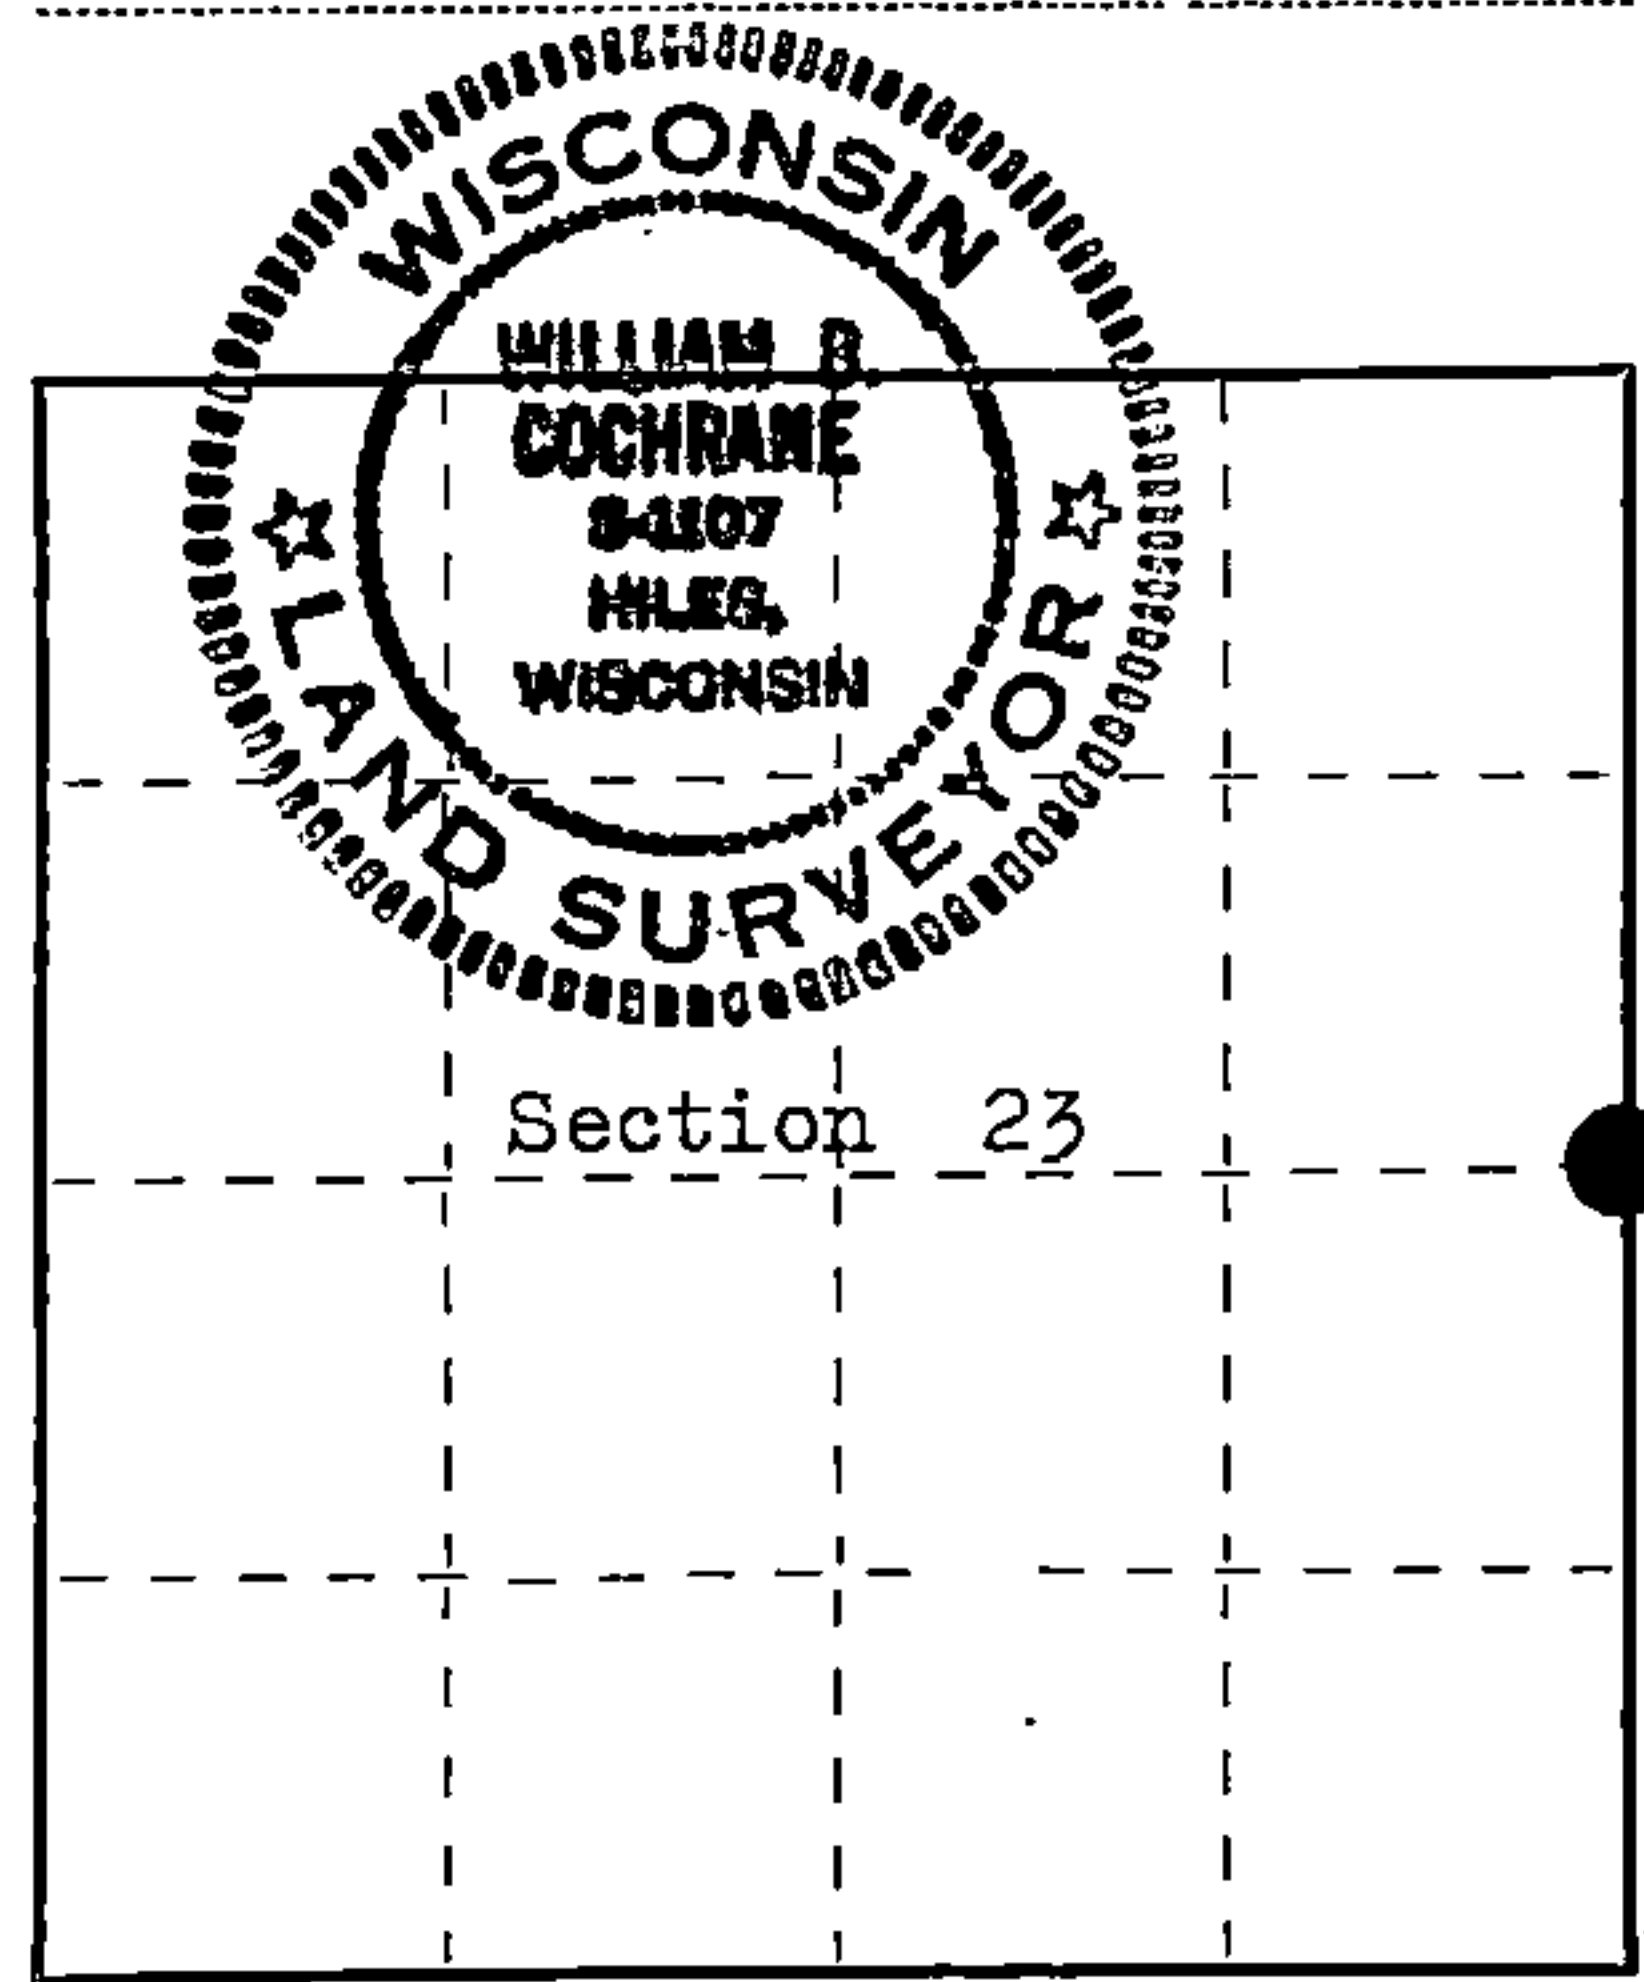

○ = Corner monument restored.

History of original corner establishment:

Surveyed in 1859 by Wm. E. Daugherty North between Sections 23 and 24 40.00 chs. Set Quarter Section Post Hemlock, 6", N 40° E, 71 lks Hemlock, 6", S 10° W, 83 lks

Description of corner evidence found:

No evidence of the corner was found. New road construction would have destroyed and corner evidence. Using the road center line for control in longitude, I set the corner at the midpoint between the Section Corners. This agrees with the original location of the road before construction.

Description of monument and accessories I established to perpetuate the original location of this corner. At the corner position, I set a 1" inside diameter, galvanized pipe, 30 inches long, 4 inches below the road surface. I set a 2½" Berntsen, A-1 Federal monument S 86° 08' 37" W, 100.00 feet, with cap stamped:

T37N R12E, ¼, S23, S24, 1977, S-1107, REFERENCE CORNER 100FT From the iron pipe: A Maple, 12", Bears S 53° E, 76.00 feet N 00° 53' 07" W, 2675.02 to the Northeast Section Corner of Section 23 S 00° 41' 24" E, 2675.02 to the Southeast Section Corner of Section 23

Dated at Hiles, Wis., this 23 rd day of August, 19 77

Signature William B. Cochrane Title Land Surveyor Registration No. S-1107
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of FOREST, I hereby certify that the within instrument was filed in this office for record on the 24th day of AUGUST, 19 77 at 10:20 o'clock A. M.

Eugene Stetson
(Register of Deeds)
By _____ Deputy

DOCUMENT NUMBER --- **112188**

A3712232000